


# PERKO® Cat No. 0955 Series Sidelights

The above lights are designed for use on sail or power driven vessels under 12 Meters (39.4 ft.) in length operating on nominal 12 volt or 24 volt systems. In order to comply with '72 COLREGS and the U.S. Inland Rules, the following must be adhered to:



## MOUNTING INSTRUCTIONS

Read all instructions before proceeding

- 1). These instructions show the orientation of each light after the proper mounting location has been determined. For proper light selection, positioning and configuration, refer to A.B.Y.C. Standard A-16\*, the '72 COLREGS\* and the U.S. Inland Navigation Rules\*. These lights are supplied complete with 12 volt bulbs (Cat. No. 0071DP0CLR 12V, 10W), however, 24 volt bulbs (Cat No. 0072DP1CLR) are available for 24 volt systems. **Note:** PERKO Series 0955 side lights used with a 24V Bulb (Cat. No. 0072DP1CLR) are not certified in accordance with 33 CFR 183.810 as these lights are intended for replacement use only on appropriate vessels constructed prior to 11/1/03. All previous certifications apply.
- 2). These lights are designed to be mounted on a vertical surface that is parallel to the centerline of the boat.
- 3). Draw a 6 inch long horizontal reference line through the center of the selected mounting location and parallel to the centerline of the boat.
- 4). Cut out the mounting template on the opposite side. Tape it on the mounting surface such that the reference line (drawn above) is directly underneath the reference line marked on the template, and the arrow on the template points ahead (not astern).
- 5). Drill 3 holes through the template for #4 mounting screws.
- 6). Drill a 1/2 inch diameter hole as indicated to provide the necessary clearance for the supply connections.
- 7). Attach supply connections to the light, making sure to wire in accordance with both A.B.Y.C. Standard E-9 and U.S. Coast Guard Safety Standards for Boat Electrical Systems (33 CFR 183)\*.
- 8). Mount the light on the correct side of the boat in accordance with Diagram #1. Use the mounting screws to pull the top down to the base until it snaps in place. Note that there are thin reference marks around the outside of the black base that must be aligned with the reference line (drawn in Step #3) for the final accuracy of the mounting orientation.
- 9). Recheck that red shows to port and green shows to starboard.

\* The above referenced standards can be obtained from:


1). American Boat & Yacht Council, Inc.  
613 Third Street, Suite 10  
Annapolis, MD 21403

2). U.S. Coast Guard  
Washington, D.C. 20593  
(or your local C.G. Office)

11/06  
0955INS1

PERKO, Inc.  
16490 N.W. 13th Avenue  
Miami, FL 33169-5707  
www.perko.com

## DIAGRAM #1

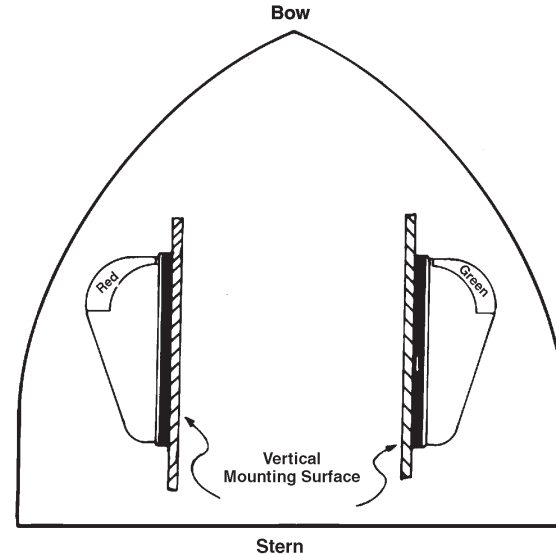

# MOUNTING TEMPLATE

CAT. NOS. 0955000CHR  
0955DP0CHR

